


Bushing de Reducción NPT GHB

GHB

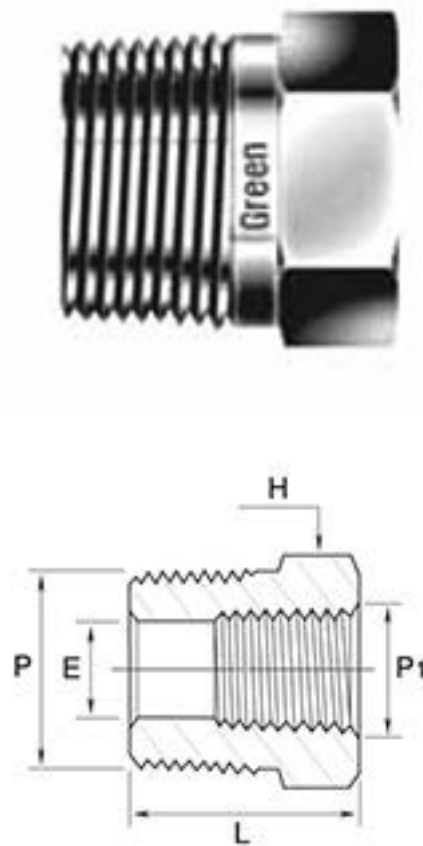

Número	P ₁ Masculino NPT en.	P ₁ Femenino NPT en.	L mm	E mm	H Hex mm	Trabajo de Presión (psig)	
						ss316, C.Steel	Latón
GHB 4-2N	1/4	1/8	26.7	7.1	14.2	447 (6400)	227 (3200)
GHB 6-2N	3/8	1/8	21.8	8.5	17.4	633 (9100)	323 (4600)
GHB 6-4N	3/8	1/4	30.0	9.6	19.05	454 (6500)	227 (3200)
GHB 8-2N	1/2	1/8	27.4	8.5	22.2	840 (12100)	427 (6100)
GHB 8-4N	1/2	1/4	27.4	11.7	22.2	571 (8200)	303 (4300)
GHB 8-6N	1/2	3/8	35.6	11.9	22.2	365 (5200)	179 (2500)
GHB 12-4N	3/4	1/4	27.4	11.4	26.9	826 (11900)	413 (5900)
GHB 12-6N	3/4	3/8	27.4	15.0	26.9	564 (8100)	296 (4200)
GHB 12-8N	3/4	1/2	41.4	15.7	26.9	337 (4800)	165 (2300)
GHB 16-4N	1	1/4	34.8	11.4	34.9	999 (14400)	509 (7300)
GHB 16-8N	1	1/2	34.8	18.5	34.9	592 (8500)	296 (4200)
GHB 16-12N	1	3/4	34.8	22.4	34.9	365 (5200)	179 (2500)