


# Safety Padlock OSHA-PL01



- ◆ Durable, lightweight with non-conductive PA lock bodies, passed temperature from -57°C to +177°C, shock resistance, the shackle is Chrome plating, the non-conductive shackle is made from Nylon, ensure the strength and deformation fracture not easily.
- ◆ Resistance of chemical, extreme temperatures and UV rays.
- ◆ Key retaining feature ensure the padlocks are not left unlocked.
- ◆ Laser printing available, front or flanks.
- ◆ Several types classified by lock bodies; all different colors available.
- ◆ Contain "DANGER" and "PROPERTY OF" standard labels on front and back.
- ◆ Can be engraved with customers` logo if required. Can be customized noctilucence PVC sign.

## Shackle Material: Steel (A3)

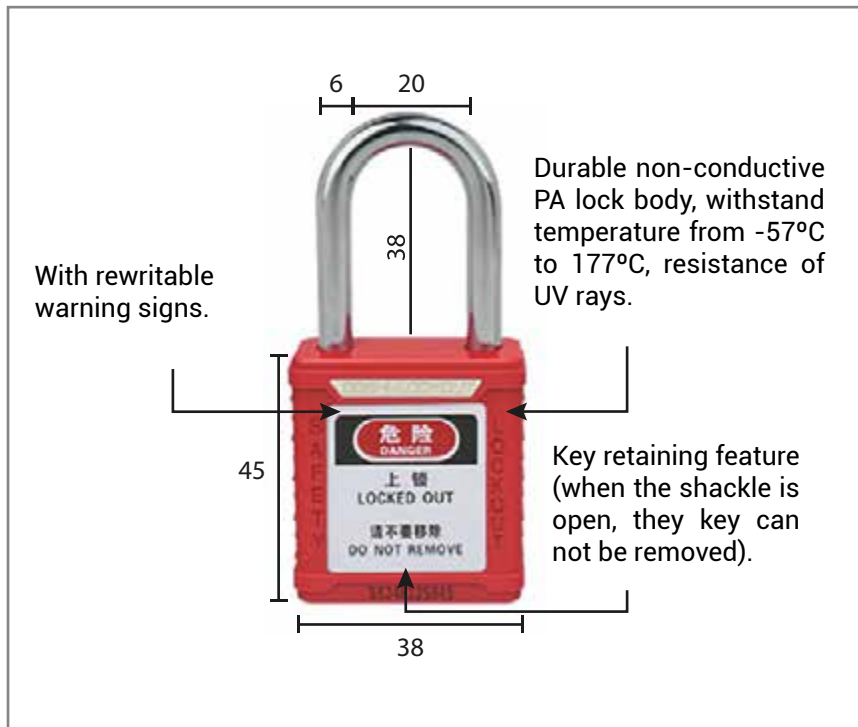

### Steel Shackle

Part code end "S" stand for Stainless Steel Shackle;

**Example 1:** BD-G01 is the Part Code of Red Steel Shacked Padlock;

**Example 2:** BD-G01S es the Part Code of Red Stainless Steel Shackle Padlock.

## Shackle Material: Nylon



### Nylon Shackle

Antimagnetic explosion-proof, generally used in electricity.